

Memory Module Specification

KVR533D2E4K2/2G

2GB (1GB 128M x 72-Bit x 2 pcs.) DDR2-533 CL4 ECC 240-Pin DIMM Kit

DESCRIPTION:

ValueRAM's KVR533D2E4K2/2G is a kit of two 128M x 72-bit (1GB) DDR2-533 CL4 SDRAM (Synchronous **DRAM**) ECC memory modules. Total kit capacity is 2GB. The components on each module include eighteen 64M x 8-bit (16M x 8-bit x 4 Bank) DDR2-533 SDRAM in FBGA packages. Each 240-pin DIMM uses gold contact fingers and requires +1.8V. The electrical and mechanical specifications are as follows:

FEATURES:

☑ Clock Cycle Time (tCK) CL=4 3.75ns (min.) / 8ns (max.)

Row Cycle Time (tRC) 55ns (min.)

Refresh to Active/Refresh Command Time (tRFC) 127.5ns

Row Active Time (tRAS) 40ns (min.) / 70,000ns (max.)

Single Power Supply of +1.8V (+/-.1V)

Power (IDD0) 2.754 W (operating)

✓ UL Rating 94 V - 0

Note: The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.250" (31.75mm).

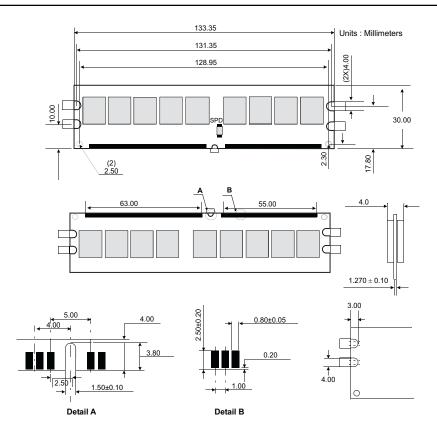


Figure 1: KVR533D2E4K2/2G 240-Pin DIMM Kit